

• 3U - Vertical Configuration


Features

- EMC integrated system in 19" rack mount
- Aluminum enclosure
- Dimension: 3U (H) x 84T (W) x 283mm (D)
- 4/6/8-slot 3U CompactPCI backplane
- Front cage: 8-slot, 3U x 160mm
- Rear I/O: 8-slot, 3U x 80mm
- 250 W ATX or 250 W cPCI power supply
- 1 x 5.25" and 1 x 3.5" device holders
- Customization is available



P/N: P-384283

Mechanical Design

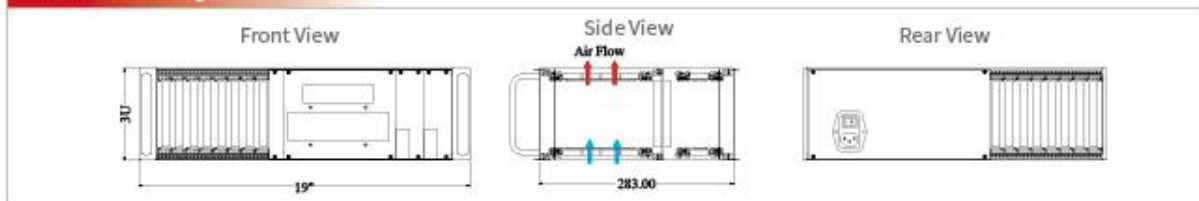

Specifications

Backplane	4/6/8-slot 6U CompactPCI backplane(PICMG 2.16 or RICMG2.0R3.0 compliance)		
Power Supply ATX type	Output power	250 W	
	Output voltage	+5V/16A, +12V1/16A, +12V2/16A, -12V/0.8A, +3.3V/16.0A, +5vsb/2.5A	
	Input voltage	100 - 240 VAC	Frequency 50 - 60 Hz
Power Supply cPCI type	Output power	250 W (3U 8HP Pluggable)	
	Output voltage	+5V/25 A, +3.3V/18 A, +12V/5A, -12V/0.5 A	
	Input voltage	90 - 264 VAC	Frequency 47 - 63 Hz