

## • 2U - Horizontal Configuration


### Features

- EMC integrated system in 19" rack mount
- Aluminum enclosure
- Dimension: 2U (H) x 84T (W) x 283mm (D)
- 3 fans in a pluggable 2U fan unit
- 4-slot 6U CompactPCI backplane
- Front cage: 4-slot, 6U x 160mm
- Rear I/O: 4-slot, 6U x 80mm
- 250 W ATX or 250 W cPCI power supply
- Option: 1 x 3.5" HDD and 1 x slim CD-ROM device holders
- Customization is available



P/N: P-284283

### Mechanical Design

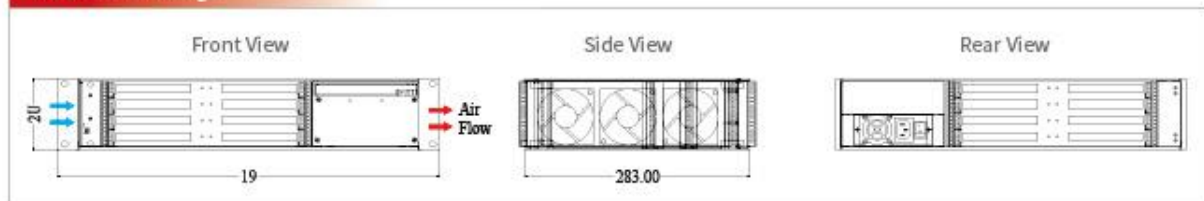

### Specifications

Fan Unit	Fan Mode	Bearing type	Nominal Voltage	DC 12 V
	Dimension	70 x 70 x 15 mm	Noise	30 dB
Backplane	4-slot 6U CompactPCI backplane(PICMG 2.16 or RICMG2.0 or 3.0 compliance)			
Power Supply ATX type	Output power	250 W		
	Output voltage	+5V/16A, +12V1/16A, +12V2/16A, -12V/0.8A, +3.3V/16.0A, +5vsb/2.5A		
	Input voltage	100 - 240 VAC	Frequency	50 - 60 Hz
Power Supply cPCI type	Output power	250 W (3U 8HP Pluggable)		
	Output voltage	+5V/25A, 3.3V/18A, +12V/5A, -12V/0.5A		
	Input voltage	90 - 264 VAC	Frequency	47 - 63 Hz