

VPX 3U 2Slot PWR Backplane

Features

- Compliant to VITA 62
- Input (Max) : 80A
- M3 studs power entry
- Power Input :
 - +DC_IN/ACL
 - DC_IN/ACN
 - CHASSIS GND
- Power Output :
 - PO1(Vs1) : +12 VDC@40A
 - PO2(Vs2) : +3.3 VDC@40A
 - PO3(Vs3) : +5 VDC@40A
 - +3.3_AUX@6A
 - +12VAUX@1A
 - 12VAUX@1A

Board Specifications

- PCB size : 128.7 mm x 49.6 mm x 5.4 mm
- 5 HP(25.40 mm) from slot to slot
- Operating temperature: -40° - +85°C
- Storage temperature: -55°C - +85°C


VPX 3U 2Slot PWR Backplane

Actual Picture




Mechanical

■ Side View

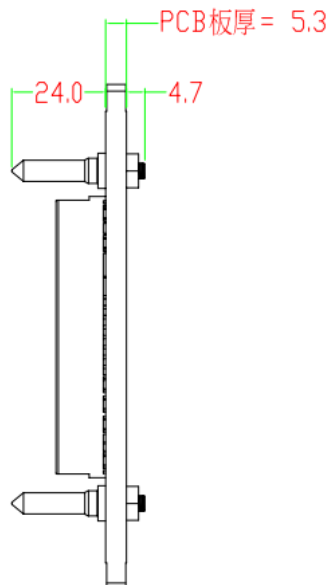

VPX 3U 2Slot PWR Backplane

■ Front View

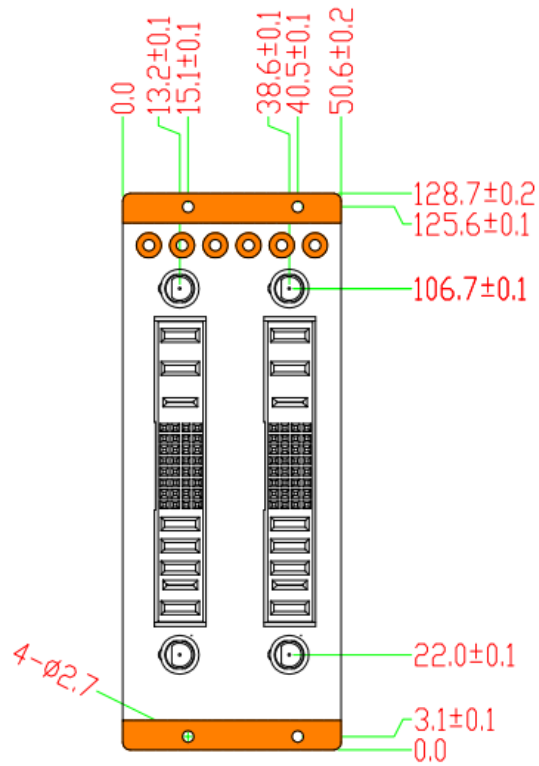

■ Rear View

